



SRTTU

Journal of Computational and Applied Research  
in Mechanical Engineering

jcarme.sru.ac.ir

JCARME

ISSN: 2228-7922

**Research paper**

## Effect of fuel injection pressure of microalgae spirulina biodiesel blends on engine characteristics

Upendra Rajak<sup>a</sup>, Prerana Nashine<sup>b</sup> and Tikendra Nath Verma<sup>a,\*</sup>

<sup>a</sup>Department of Mechanical Engineering, NIT Manipur-795001, India

<sup>b</sup>Department of Mechanical Engineering, NIT Rourkela-769008, India

---

**Article info:**
**Article history:**

Received: 30/01/2019

Revised: 13/06/2019

Accepted: 15/06/2019

Online: 19/06/2019

**Keywords:**

Numerical simulation,

CI engine,

Pressure,

Performance,

Combustion,

Emission.

**\*Corresponding author:**[verma.tikks@gmail.com](mailto:verma.tikks@gmail.com)


---

**Abstract**

The unvarying condition diesel engines used for commercial applications, transportation and industries lead to the crisis of petroleum fuel diminution and ecological squalor caused due to exhaust gases. Therefore, in this paper optimization of the use of MSB in naturally aspirated, direct injection diesel engines, parameters of pure diesel (D100), 80% diesel + 20% microalgae spirulina (B20), 60% diesel + 40% microalgae spirulina (B40) and pure microalgae spirulina biodiesel (B100) were investigated at various fuel injection pressures (FIP) of 18 to 26 MPa and stationary injection timings (23.5° b TDC). The result shows that optimum effect can be obtained in 22 MPa FIP, with B20 bio-diesel without compromising the performance against diesel. B20 blend presented less NO<sub>x</sub> and smoke emissions by 13.7% and 22.2% respectively with no significant change in engine performance when compared to diesel at full load operating condition. The simulation and experiment results are verified at the same operating conditions.

---

**1. Introduction**

Internal combustion engines were a necessary component in the modern era. Diesel engines have been widely used due to their ability to produce higher torque, which in turns carries heavy loads. But over time, various methodologies have been adopted in extracting waste heat [1] and reduction of various pollutants for using diesel and other biofuels [2]. Biofuels from numerous sources have been

continuously produced and extracted for use in diesel engines. One of the significant areas and latest biofuels production is the biodiesel extraction from microalgae [3-5].

Canola-safflower biodiesel with fuel additives such as solketal and ethanol has proven to reduce emissions such as CO, CO<sub>2</sub>, HC<sub>7</sub> while increasing NO<sub>x</sub> [6]. The addition of hydrogen in the diesel engines has also been widely acclaimed to reduce emissions from the engine [7]. Homogenous charged compression ignition

engines were also proven to have better combustion in comparison to standard diesel engines [8]. The structures of the nozzle have been studied further to check their effect on the mixture of fuel and air in a diesel engine. It was found that multi-hole nozzles have better homogenous mixing than the single hole nozzles [9].

As the future holds the path for clean energy [10, 11], the technologies under study by various researchers were to be deemed necessary. One such example of emission control is the capturing of CO<sub>2</sub> by integrating the evaporative gas turbine with Oxy-fuel combustion [12]. The study for gas turbines can be effectively used for cogeneration plants using diesel engine where maximum power is produced, and for the emission of minimum pollutants. Other parameters have also been checked for reduction of emission from diesel engines. Changing the piston bowl geometry to check the combustion and emission characteristics using biofuels was conducted. The study acknowledges that using shallow depth combustion chamber increases the emission of NO<sub>x</sub> at low engine speed, as compared to the hemispherical combustion chamber and Omega combustion chamber [13]. Addition of alcohol to biodiesel and diesel [14] has reported reducing NO<sub>x</sub> with an increase in fuel consumption and thermal efficiency. Emulsifiers such as Sorbitan monooleate and polyoxyethylene Sorbitan monooleate were also used for emulsification of biodiesel fuels. The study showed an increase in BTE and the reduction of exhaust gas temperature (EGT) [15]. Alternative fuels such as tire pyrolysis oil [16], waste cooking oil [17, 18], Mahua oil methyl ester [19], etc. have been successfully tested on a diesel engine for their engine characteristics.

Researchers have also predicted and concluded that among all types of alternative fuels, the combination of diesel, biodiesel, and alcohol has provided to be the most optimal case which can reduce maximum emission [20]. Another methodology such as reduction of emission using kapok methyl ester through the combined coating of partially stabilized Zirconia (PSZ) with B25 and B50 blends was also studied. The study revealed that using the thermal layer and

B50 reduces the emissions of the diesel engine while showing significant increase in BTE [21]. Numerically investigated effects of first, second and third generation fuels on a diesel engine and evaluated combustion and emission characteristics at different engine load and compression ratio (16.5 to 18.5) have been examined. The results showed the reduction in soot emission with an increased compression ratio [22].

In this study, the effect of diesel, spirulina biodiesel and its blends with the variation of fuel injection pressure is examined. Up to the authors' best of knowledge, the impact of various fuel injection pressure (VFIP) using microalgae biodiesel has not been reported. In the present study the usage of microalgae spirulina biodiesel (up to 40%) blend with diesel has been presented. The study concentrates on the effect of VFIP (18 to 26 MPa) at different engine loading with CR17.5.

## 2. Experimental setup and procedures

### 2.1. Experimental Procedure

Experiments were performed on a single cylinder, liquid cooling, and diesel engine. The technical specification of the naturally aspirated engine is given in Table 1. The single cylinder coupled with eddy current dynamometer and crank angle encoder coupled with engine shaft opposite to dynamometer as shown in Fig. 1. Measurement of engine parameters of combustion pressure with the help of Kistler piezoelectric pressure sensor and mounted at the cylinder head, exhaust gas temperature using K-type temperature sensor at different position of engine setup. The engine speed and brake power were about 1500 rpm and about 3.7 kW, respectively.

### 2.2. Fuel properties

The fuel properties of diesel and microalgae spirulina alternative fuel for a diesel engine in the present study are taken from previous studied [23-26]. The processor of biodiesel was produced from microalgae oil by using transesterification processing and properties were calculated according to ASTM standard [27].

The essential fuel properties of diesel and spirulina biodiesel are given in Table 2.

2.3. Error analysis

Calculating the total percentage of uncertainty analysis within the experimental setup by the well-known method of standard deviation is shown in Eqs. (1-5). The percentage of uncertainty analysis of all instruments is shown in Table 3. The calculating percentage of uncertainty (Wu) by standard deviation is found to be ± 2.21% and the equations are given in Appendix 1.

2.4. Model description

The numerical simulation is done with multi-zone diesel fuel spray combustion software, Diesel-RK [28-30] Diesel-RK software is based on zeldovich mechanism for NO<sub>x</sub> emission calculating. The Diesel-RK software is based on the first law of thermodynamics and is used to analyze different characteristics of a compression ignition engine. The basic model equation is given in Appendix 1.

2.5. Validation of experimental and numerical results

The validation of Diesel-RK results are done against experiment results for cylinder pressure, thermal efficiency and NO<sub>x</sub> emission using diesel fuel. The simulation results and experiment results have been depicted in Fig. 2 (a, b and c). The accuracy within the results is shown in Table 4. The maximum deviation was found to be 2.4% for cylinder pressure, 0.73% for thermal efficiency and 0.43% for NO<sub>x</sub> emission. The input initial boundary condition is given in Table 1 for the simulation and the experimental results.

3. Results and discussion

3.1. Performance parameter of research engine

3.1.1. Brake specific fuel consumption (BSFC)

The small droplets size leads to better atomization of fuel. Less droplets size are formed at higher fuel injection pressure (FIP) and gradually vaporizes small depicts. Further, fuel consumption increases when FIP increases from 18 to 26 MPa due to deprived combustion

and lower penetration length, deprived dispersion of the fuel rate and weaker air entrainment [31-33].

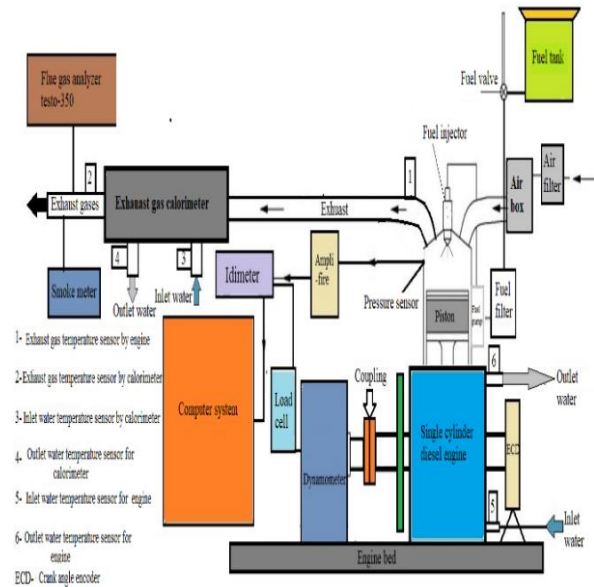


Fig. 1. Multi-fuel single cylinder engine.

Table 1. Specification of engine.

Parameters	Value
Engine type	Single cylinder four stroke
Fuel injection pressure	180 to 260 bar
Rated speed	1500 rpm
Engine cylinder/stroke	1/4
Bore x stroke	80 x 110 mm
CR	17.5
Connecting rod length	235 mm
Standard injection timing	23.5° b TDC
Eddy current dynamometer	Model: power mag, 3.7 kW
Fuel injection pressure	18-26 MPa

Table 2. Microalgae spirulina biodiesel and diesel properties.

Properties	Microalgae spirulina biodiesel			
	B0	B20	B40	B100
Calorific value (MJ/kg)	42.5-45	41.4	40.9	41.36
Flash point (°C)	52-65	61	78	130
Viscosity (mm <sup>2</sup> /s) at 40 °C	2.4-4.59	3.66	4.26	5.66
Density (kg/m <sup>3</sup> )	815-837.7	832.1	838.3	860

**Table 3.** Accuracies and uncertainty of the instruments.

Instrument	Parameter	Uncertainty (%)
Eddy current dynamometer	Load	±0.15
Speed sensor	Rpm	±1.0
Load indicator	Load	±0.2
Pressure sensor	Cylinder pressure	±0.5
Crank angle encoder	Angle	±0.2
Fuel measuring	Heights of the liquid column	±0.5
Temperature sensor	Temperature	±0.15
Heat measured	Heat value	±1.0
Smoke meter	Smoke	±1.0
Testo 350 gas analyzer	CO <sub>2</sub> NO <sub>x</sub>	± 1.0 ± 0.5

But with the increase in engine load, the BSFC decreases with increased engine load for all blend ratios of spirulina biodiesel and its blend ratio. The better combustion indicated lower fuel consumption due to the higher engine load. Fig. 3 shows the variation of BSFC at engine loads by varying FIP of 18, 20, 22, 24 and 26 MPa. At full load, the BSFC (kg/kWh) was found to be 0.257 for D100, 0.274 for B20, 0.281 for B40, and 0.328 for B100 at 22 MPa. The comparisons of BSFC for spirulina (B20) and diesel (D100), result in higher BSFC (4.1%) at full load with FIP 22 MPa due to higher density and viscosity of microalgae spirulina biodiesel, as compared to diesel and higher droplets size than the increase in the amount of BSFC.

### 3.1.2. Brake thermal efficiency (BTE)

Converting fuel chemical energy into engine output power is called BTE of compression ignition engine. The BTE is higher with an increase in higher engine load [34, 35]. Fig. 4 describes the variation of BTE with variation FIP and loads for microalgae spirulina biodiesel and its blends. The BTE (%) was found to be 33.19, 33.08, 32.94, 32.87 and 32.97 for D100; 32.22, 32.66, 32.5, 32.41 and 32.54 for B20; at FIP of 18, 20, 22, 24 and 26 MPa respectively at 100% load. At 100% engine load was found to be higher for diesel fuel as compared to microalgae biodiesel and its blends. The BTE of microalgae

biodiesel (B20) biodiesel was found to be close with diesel.

## 3.2. Combustion parameter of research engine

### 3.2.1. Cylinder pressure

The cylinder peak pressure (CPP) increases with an increase in FIP and engine load due to better fuel atomization. The higher latent heat of biodiesel vaporization leads to poor fuel atomization and leads to lower CPP. CPP and cylinder peak temperature is higher with high FIP due to the latent heat of vaporization fuel decrease [36, 37]. The CPP—depends on fuel injected into the combustion chamber, ignition delay, and fuel consumption. Fig. 5 (a-e) shows cylinder pressure versus engine load at different injection pressure. At higher loads, diesel displays higher CPP as compared to spirulina biodiesel and its blend fuels. At 100% load, it was observed that the CPP (bar) was found to be 106.21, 107.4, 108.2, 108.9, and 108.4 for diesel (D100); 106.1, 106.7, 107.5, 107.9 and 107.8 for spirulina biodiesel (B20) at 18, 20, 22, 24 and 26 MPa FIP respectively for full load condition. The CPP while using B100 was found to be lower (2.4%) than that of D100 for 220 bar FIP, with CR17.5.

### 3.2.2. Heat release rate

Maximum heat release rate (MHRR) values and their locations were very almost near to each other. The differences between the areas of MHRR were almost near 2° CA for diesel and microalgae spirulina and its blends [38-40]. Fig. 6(a, b) shows cylinder pressure versus crank angle at full and partial engine load for diesel, spirulina biodiesel and its blend with diesel at 220 bar FIP. At 100% load, diesel displays higher MHRR as compared to spirulina biodiesel and its blend fuels. At 50% and 100% load, it was observed that the MHRR (J/ deg.) was found to be 66.8 and 94.7 for diesel (D100) respectively. The value of 59.9, 57.8, 54.2 were for spirulina biodiesel (B20, B40, B100) at partial load and 93.0, 89.5, 69.7 for spirulina biodiesel (B20, B40, B100) at full load with FIP of 22 MPa. The MHRR while using B20% was

found to be lower by 1.8%, as compared to D100 for FIP of 22 MPa, with CR17.5.

3.2.3. Ignition delay period (IDP)

The IDP, an outstanding design and performance parameter of the CI engine, is defined as the period difference between the beginning of fuel injection at the start of combustion. The ignition delay period is affected by different parameters of CI engine like CN, FIP, CR, RPM, and intake temperature and the air-fuel ratio. The IDP of biodiesel and its blend was found to be lower in comparison to a diesel with higher FIP upon modification of the engine. Air-fuel mixing rate is better within the combustion cylinder described shorter ignition delay period. Longer IDP leads to extended air and fuels mixing rate, and it results in higher sudden heat release rate. Fig. 7 (a-e) depicts ignition delay with engine loads for biodiesel and its blends. The ignition delays (degree) were found to be 10.68, 10.67, 10.66, 10.65 and 10.6 for diesel (D100), 9.07, 9.06, 9.03, 9.02 and 9.0 for spirulina biodiesel (B20) for FIP of 18, 20, 22, 24 and 26 MPa respectively, at 100% load condition. There is closeness in the IDP of diesel with spirulina biodiesel (B20).

3. 3. Emission parameter of research engine

3.3.1. Bosch smoke number

Bosch smoke number (BSN) at various injection pressures for the different biodiesel blends of microalgae spirulina biodiesel and its blends and diesel fuel for engine loads are shown in Fig. 8. At 100% load, the smoke emission (BSN) was found to be 1.02, 0.93, 0.90, 0.88 and 0.81 for diesel; 0.72, 0.71, 0.70, 0.68 and 0.62 for spirulina biodiesel (B20) at various FIP (18, 20, 22, 24 and 26 MPa), at 100% load condition respectively. BSN for spirulina biodiesel (B20) was lower by 22.2% as compared to diesel (D100) at FIP of 22 MPa with full load condition. Thus, smoke emission was higher for diesel fuel in comparison to microalgae spirulina biodiesel and its blends due to higher percentage of oxygen. It is clear from the figure that with an increase in engine load, smoke emission increases.


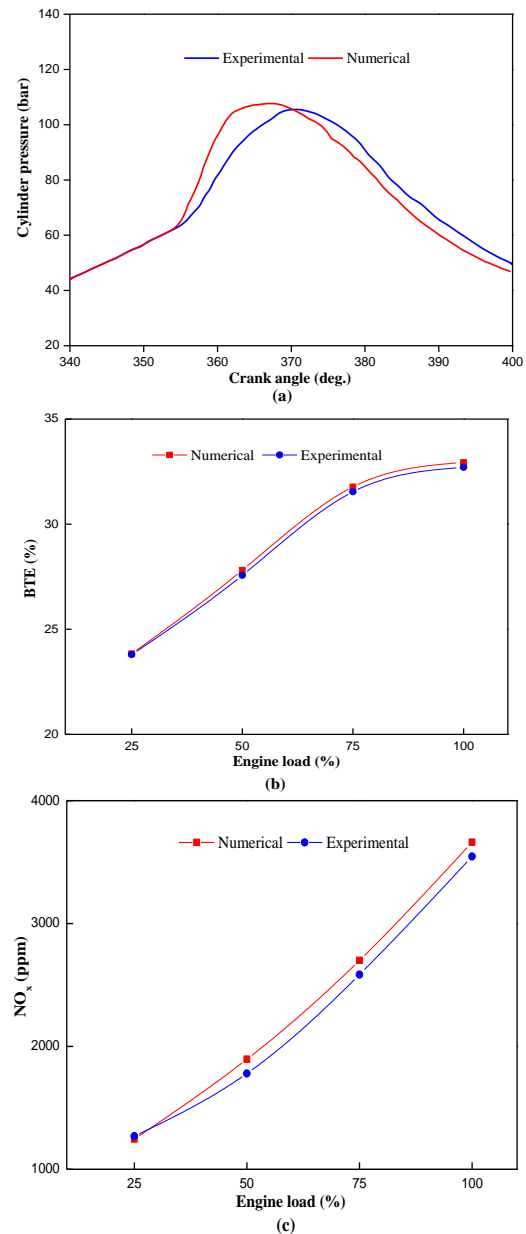



Fig. 2. Comparison of numerical and experimental results of at various engine loads at (a) cylinder pressure versus crank angle, (b) BTE versus engine load, and (c) NO<sub>x</sub> of diesel fuel at various engine loads at 220 bar.

Table 4. Comparison between experimental data and numerical values at 100% load.

Parameters	Numerical values	Experimental results	Error deviation
CPP (bar)	108.2	105.6	2.40%
BTE (%)	32.94	32.7	0.73%
NO <sub>x</sub> (ppm)	3661	3645	0.43%

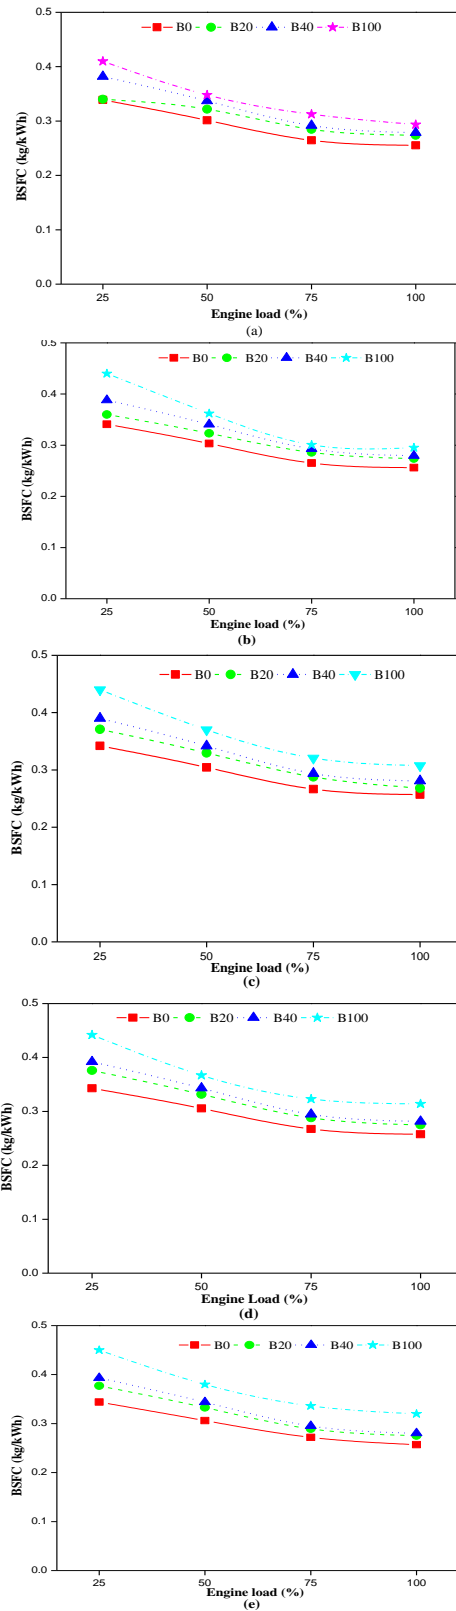

**Fig. 3.** BSFC of different blend ratio at various engine loads for (a) 180 bar, (b) 200 bar, (c) 220 bar, (d) 240 bar, and (e) 260 bar.

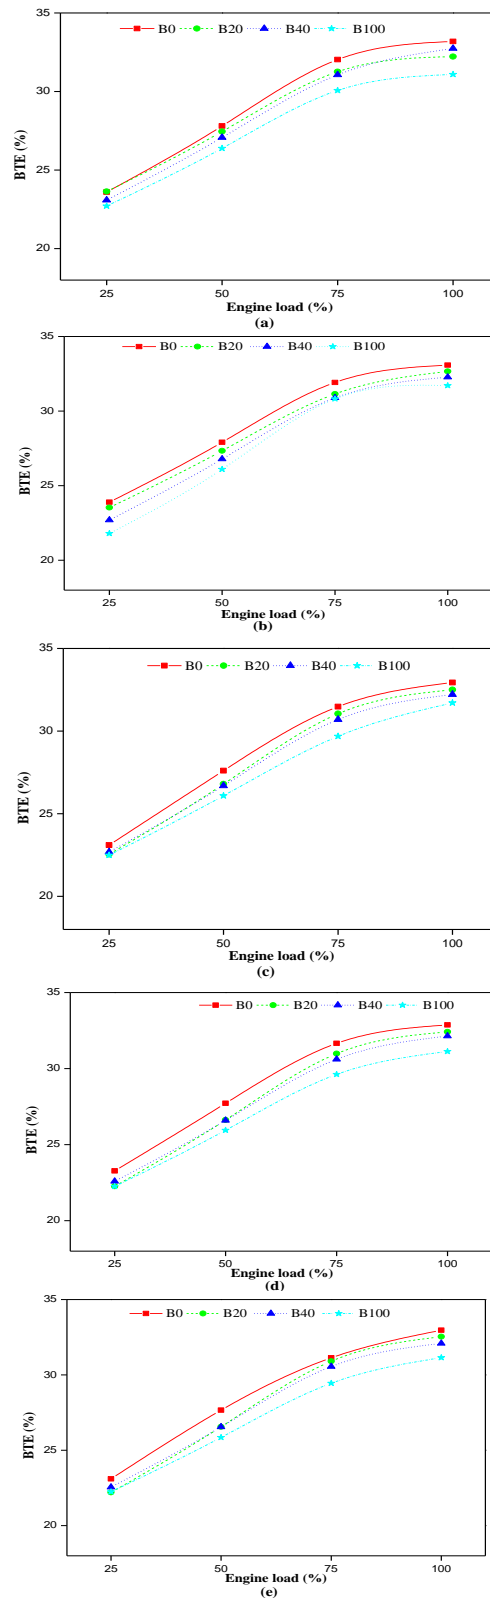

**Fig. 4.** BTE of different blend ratio at various engine loads for (a) 180 bar, (b) 200 bar, (c) 220 bar, (d) 240 bar, and (e) 260 bar.

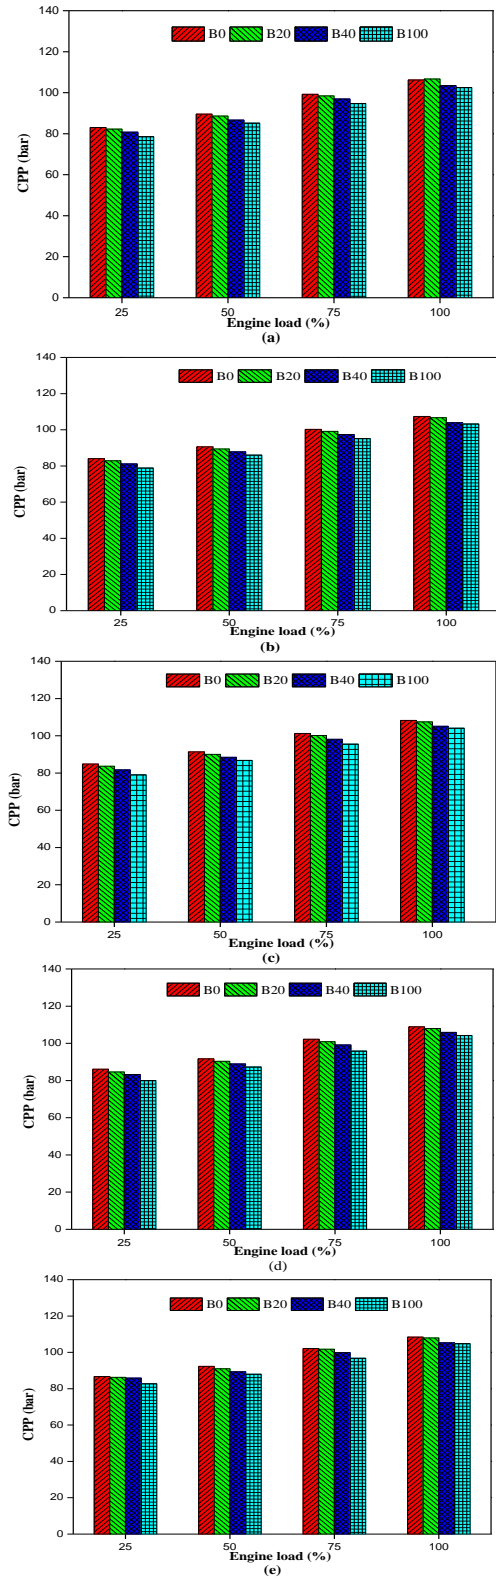


Fig. 5. CPP of different blend ratio at various engine loads for (a) 180 bar, (b) 200 bar, (c) 220 bar, (d) 240 bar, and (e) 260 bar.



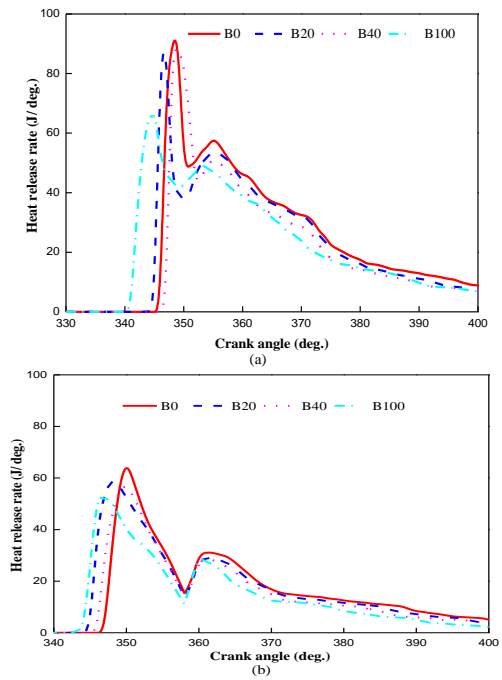


Fig. 6. HRR with crank angle at (a) 100% and (b) 50% load at 22 MPa.

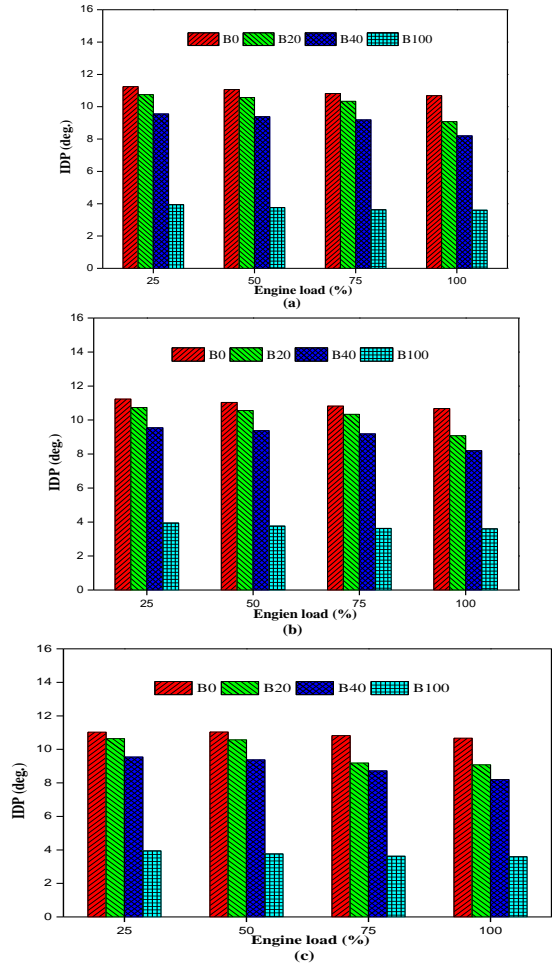


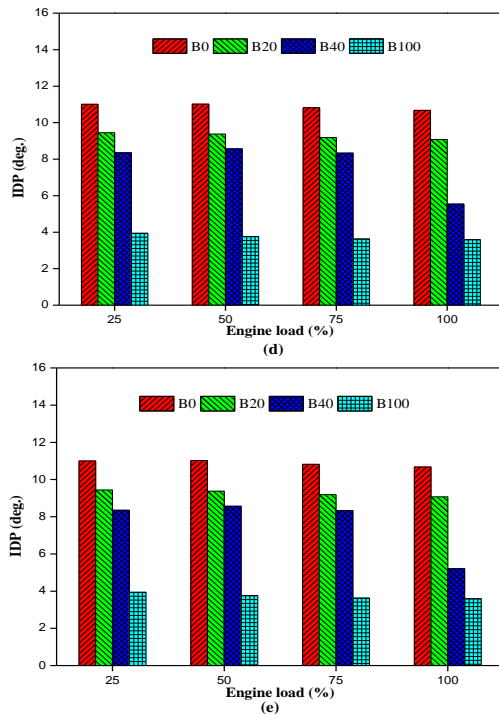

**Fig. 7.** Ignition delay period of different blend ratio at various engine loads for (a) 180 bar, (b) 200 bar, (c) 220 bar, (d) 240 bar, and (e) 260 bar.



3.3.2. Fraction of wet NO<sub>x</sub> in exhaust gas

The NO<sub>x</sub> emission at various injection pressures for different biodiesel blends of spirulina biodiesel with diesel fuels and different loading are shown in Fig. 9. At 100% load, the NO<sub>x</sub> (ppm) was found to be 3473.6, 3576, 3661, 3715 and 3774 for diesel; 3304.6, 3305, 3389, 3456 and 3497 for spirulina biodiesel (B20) at various FIP (18, 20, 22, 24 and 26 MPa) respectively. The fraction of NO<sub>x</sub> emission is lowered by 7.4% for spirulina biodiesel (B20) as compared to diesel (D100) at FIP of 22 MPa with full load condition. Thus, NO<sub>x</sub> emission was found to be higher for diesel fuel in comparison to spirulina biodiesel and its blends. The NO<sub>x</sub> increases with increasing load due to higher combustion temperature. It can be observed that the NO<sub>x</sub> emission depends on the combustion temperature and oxygen contents. Low combustion heat release rate led to low NO<sub>x</sub> emission.

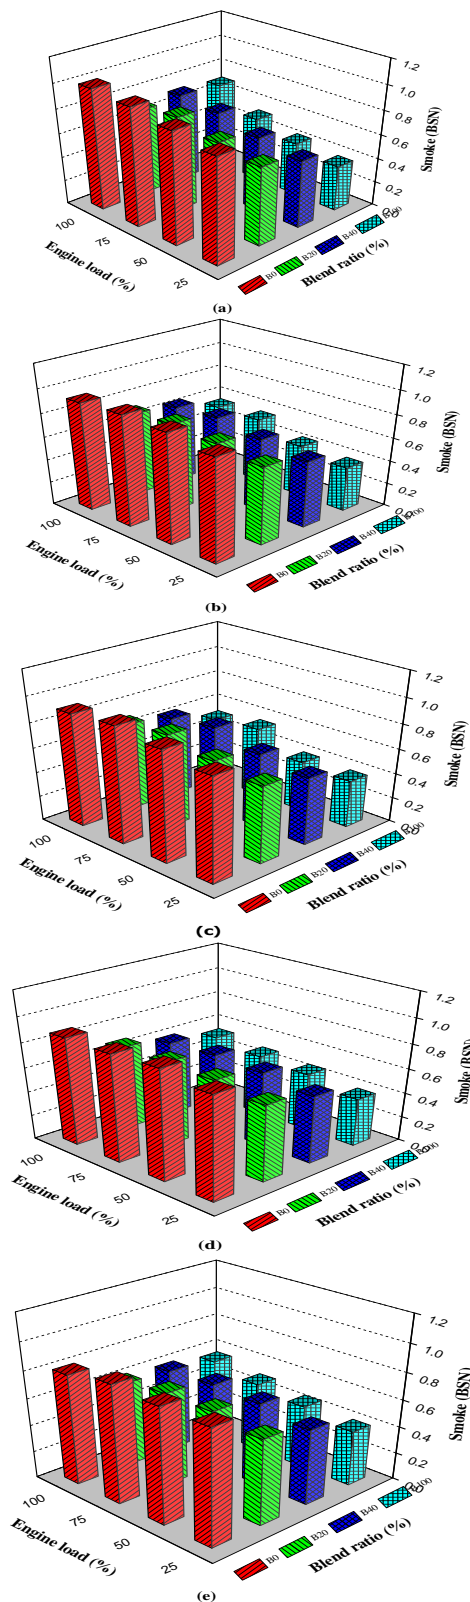

**Fig. 8.** Smoke level of different blend ratio at various engine loads for (a) 180 bar, (b) 200 bar, (c) 220 bar, (d) 240 bar, and (e) 260 bar.



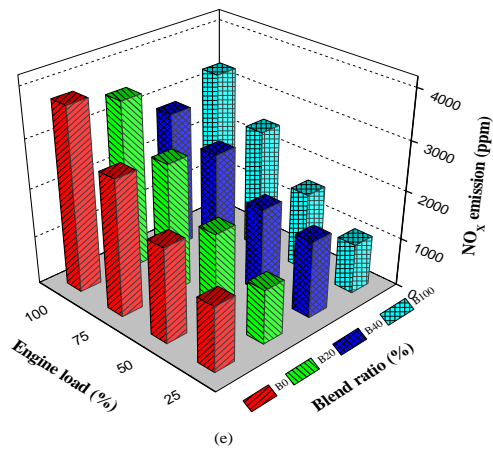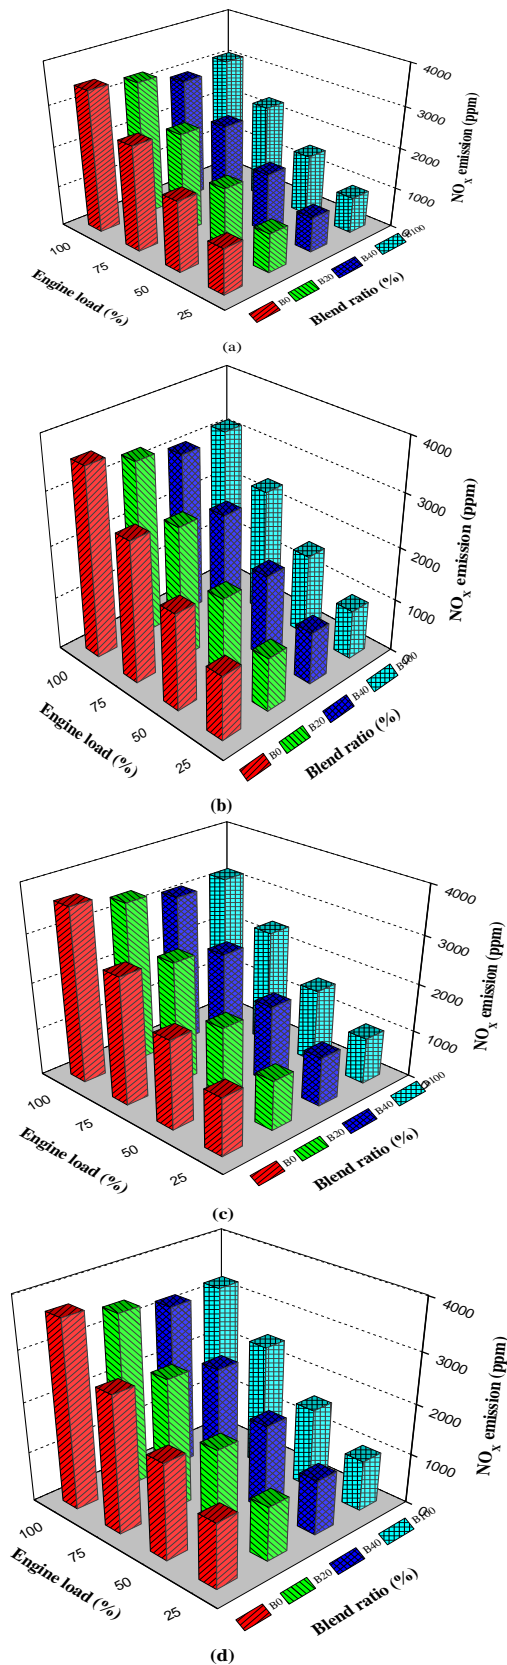

**Fig. 9.** NO<sub>x</sub> emission of different blend ratio at various engine loads for a) 180 bar, b) 200 bar, c) 220 bar, d) 240 bar, and e) 260 bar.

#### 4. Conclusions

A summary of the present study follows:

- Microalgae spirulina biodiesel has been used as an alternative fuel in place of diesel.
- In all the blend ratio of spirulina biodiesel, IDP is short as compared to D100, due to a higher CN of spirulina biodiesel.
- While snowballing the percentage of biodiesel, there is a decrease in BTE and EGT, while there is an increase in BSFC.
- At 100% load, BTE was highest for the diesel. The BTE was found to be lower by 1.33% for spirulina biodiesel (B20) as compared to diesel at full load conditions with FIP (22 MPa).
- At full loading, BTE is lowered by 1.33%, but BSFC was higher by 4.1% for spirulina biodiesel (B20) as compared to diesel (D100) at FIP of 22 MPa.
- The MHRR while using spirulina biodiesel (B20) was found to be lower by 1.8%, as compared to diesel fuel (D100) for FIP of 22 MPa, with CR17.5.
- With an increase in engine load, it shows a potential reduction in CO<sub>2</sub> emission.

B20 (80% diesel and 20% spirulina microalgae biodiesel) can be used as an alternative fuel in diesel engines; in this approach emission values can be reduced.

#### Acknowledgements

The authors are grateful to the National Institute of Technology Manipur supporting research work.

**Appendix 1**  
**Uncertainty analysis**

The uncertainty in each individual amount (Xi) leads to the accuracy of results for any variable ‘U’ that is computed by n independent measurement of the following relation [22, 27, 28, 30, 36, 40].

$$U = a_1X_1 + a_2X_2 + \dots + a_nX_n = \sum a_iX_i \tag{1}$$

$$\frac{\partial U}{\partial X_i} = a_i \tag{2}$$

The total percentage of uncertainty in the result may then be seen in the following equation as

$$w_U = \left\{ \sum \left[ \left( \frac{\partial U}{\partial X_i} \right)^2 w_{X_i}^2 \right] \right\}^2 \tag{3}$$

$$w_U = \left\{ \sum \left[ (a_i)^2 w_{X_i}^2 \right] \right\}^2 \tag{4}$$

$$w_U = \sqrt{\left( (0.15)_{ECD}^2 + (1)_{SS}^2 + (0.2)_{LI}^2 + (0.5)_{PS}^2 + (0.2)_{CAE}^2 + (0.5)_{FM}^2 + (0.15)_{TS}^2 + (1)_{HVM}^2 + (1)_{SM}^2 + (1)_{CO_2}^2 + (0.5)_{NO_x}^2 \right)} \tag{5}$$

**Diesel-RK model equation**

The governing equations for Diesel-RK model are given in Eqs. (6-14) [16, 27, 30].

*Conservation of energy*

$$\frac{d(mu)}{dt} = -p \frac{dv}{dt} + \frac{dQ_{ht}}{dt} + \sum_j \dot{m}_j h_j \tag{6}$$

Heat model

(a) Ignition delay period model

$$\tau = 3.8 \times 10^{-6} (1 - 1.6 \times 10^{-4} n) \sqrt{\frac{T}{p}} \exp\left(\frac{E_a}{8.312T} - \frac{70}{CN + 25}\right) \tag{7}$$

(b) Premixed combustion period model

$$\frac{dx}{dt} = \Phi_0 \times \left( A_0 \left( \frac{m_f}{v_i} \right) \times (\sigma_{ud} - x_0) \times (0.1 \times \sigma_{ud} + x_0) \right) + \Phi_1 \times \left( \frac{d\sigma_u}{dt} \right) \tag{8}$$

(c) Controlled combustion period model



$$\frac{dx}{dt} = \Phi_1 \times \left( \frac{d\sigma_u}{dt} \right) + \Phi_2 \times \left( A_2 \left( \frac{m_f}{v_c} \right) \times (\sigma_u - x) \times (\alpha - x) \right) \tag{9}$$

(d) Burning period model

$$\frac{dx}{dt} = \Phi_3 A_3 K_T (1 - x) (\xi_b \alpha - x) \tag{10}$$

NO<sub>x</sub> formation model

The calculating NOX emission is based on Zeldovich mechanism. The NOX emission grouped with nitric oxide (NO) and nitrogen dioxide (NO<sub>2</sub>). The zeldovich mechanism shown in Eqs. (11-14) [14, 24].



$$\frac{d[NO]}{dt} = \frac{P \times 2.333 \times 10^{-7} \cdot e^{-\frac{38020}{T_b}} [N_2]_e \cdot [O]_e \cdot \left\{ 1 - \left( \frac{[NO]}{[NO]_e} \right)^2 \right\}}{R \cdot T_b \cdot \left( 1 + \frac{2365}{T_b} \cdot e^{-\frac{2365}{T_b}} \cdot \frac{[NO]}{[O_2]_e} \right)} \cdot \frac{1}{\omega} \tag{14}$$

**References**

- [1] G. Bidini, U. Desideri, S. Saetta and P. P. Bocchini, “Internal Combustion Engine Combined Heat and Power Plants: Case Study of the University of Perugia Power Plant”, *Appl. Therm. Eng.*, Vol. 18, No. 6, pp. 401-412, (1998).
- [2] Y. Wang, H. Liu and C. F. Lee, “Particulate matter emission characteristics of diesel engines with biodiesel or biodiesel blending: A review”, *Renewable Sustainable Energy Rev.*, Vol. 64 (Oct 2016), pp. 569–581, (2016).
- [3] B. E. O. Eboibi, D. M. Lewis, P. J. Ashman and S. Chinnasamy, “Effect of operating conditions on yield and quality of biocrude during hydrothermal liquefaction of halophytic microalga *Tetraselmis* sp.”, *Bioresour. Technol.*, Vol. 170, pp. 20–29, (2014).
- [4] Y. Chisti and J. Yan, “Energy from algae: Current status and future trends Algal biofuels – A status report”, *Appl. Energ.*, Vol. 88, No.10, pp. 3277–3279, (2011).
- [5] F. M. Hossain, N. Nabi, T. J. Rainey, T. Bodisco, K. Suara, S. M. A. Rahman, T. C. Van, Z. Ristovski and R. J. Brown, “Investigation of microalgae HTL fuel effects on diesel engine performance and exhaust emissions using surrogate fuels”,

- Energy Convers. Manage.*, Vol. 152, pp. 186–200, (2017).
- [6] E. Alptekin, “Emission, injection and combustion characteristics of biodiesel and oxygenated fuel blends in a common rail diesel engine”, *Energy*, Vol. 119, pp. 44–52, (2017).
- [7] S. M. Hosseini and R. Ahmadi, “Performance and emissions characteristics in the combustion of co-fuel diesel-hydrogen in a heavy duty engine”, *Appl. Energ.*, Vol. 205, pp. 911–925, (2017).
- [8] L. Zhou and H. Wei, “An investigation of in situ adaptive tabulation for premixed and non-premixed combustion engine simulations with primary reference fuel mechanism”, *Appl. Therm. Eng.*, Vol. 111, pp. 526–536, (2017).
- [9] E. Song, Z. Liu, L. Yang, C. Yao, J. Sun and Q. Dong, “Effects of nozzle structure on the gas mixture uniformity of marine gas engine”, *Ocean. Eng.*, Vol. 142, pp. 507–520, (2017).
- [10] G. Krajac’ic, N. Duic’, M. Vujanovic’, S. Kilkis, M. A. Rosen and M. A. Al-Nimr, “Sustainable development of energy, water and environment systems for future energy technologies and concepts”, *Energy Convers. Manage.*, Vol. 125, pp. 1-14, (2016).
- [11] J. D. Lee, J. Yan, S. K. Chou and U. Desideri, “Clean, efficient, affordable and reliable energy for a sustainable future”, *Energy Convers. Manage.*, Vol. 102, pp. 1-3, (2015).
- [12] Y. Hu, H. Li and J. Yan, “Integration of evaporative gas turbine with oxy-fuel combustion for carbon dioxide capture”, *Int. J. Green Energy*, Vol. 7, No. 6, pp. 37–41, (2010).
- [13] J. Li, W. M. Yang, H. An, A. Maghbouli and S. K. Chou, “Effects of piston bowl geometry on combustion and emission characteristics of biodiesel fueled diesel engines”, *Fuel*, Vol. 120, pp. 66–73, (2014).
- [14] S. Salam and T. N. Verma, “Appending empirical modelling to numerical solution for behaviour characterisation of microalgae biodiesel”, *Energy Convers. Manage.*, Vol. 180, pp. 496-510, (2019).
- [15] O. A. Elsanusi, M. M. Roy and M. S. Sidhu, “Experimental investigation on a diesel engine fueled by diesel-biodiesel blends and their emulsions at various engine operating conditions”, *Appl. Energy*, Vol. 203, pp. 582–593, (2017).
- [16] R. Vihar, Z. Urban, T. Seljak and T. Katrasnik, “Combustion and emission formation phenomena of tire pyrolysis oil in a common rail Diesel engine”, *Energy Convers. Manage.*, Vol. 149, pp. 706-721, (2017).
- [17] Z. Wen, X. Yu, S. T. Tu, J. Yan and E. Dahlquist, “Biodiesel production from waste cooking oil catalyzed by TiO<sub>2</sub> – MgO mixed oxides”, *Bioresour. Technol.*, Vol. 101, No. 24, pp. 9570–9576, (2010).
- [18] T. S. Singh and T. N. Verma, “Taguchi design approach for extraction of methyl ester from waste cooking oil using synthesized CaO as heterogeneous catalyst: Response surface methodology optimization”, *Energy Convers. Manage.*, Vol. 182, pp. 383-397, (2019).
- [19] D. Sonar, S. L. Soni, D. Sharma, A. Srivastaba and R. Goyal, “Performance and emission characteristics of a diesel engine with varying injection pressure and fuelled with raw mahua oil (preheated and blends) and mahua oil methyl ester”, *Clean Technol. Envir.*, Vol. 17, No. 6, pp. 1499–1511, (2015).
- [20] S. S. Hoseini, G. Naja, B. Ghobadian, R. Mamat, N. Azwadi, C. Sidik and W. H. Azmi, “The effect of combustion management on diesel engine emissions fueled with biodiesel-diesel blends”, *Renewable Sustainable Energy Rev.*, Vol. 73, pp. 307–331, (2017).
- [21] S. Vedharaj, R. Vallinayagam, W. M. Yang, C. G. Saravanan, S. K. Chou, K. J. E. Chua and P. Lee, “Reduction of harmful emissions from a diesel engine fueled by kapok methyl ester using combined coating and SNCR technology”, *Energy Convers. Manage.*, Vol. 79, pp. 581–589, (2014).

- [22] U. Rajak and T. N. Verma, "Influence of combustion and emission characteristics on a compression ignition engine from a different generation of biodiesel", *Eng. Sci. Technol.*, Vol. 23, No. 1, pp. 10-20, (2019).
- [23] U. Rajak, P. Nashine and T. N. Verma, "Assessment of diesel engine performance using spirulina microalgae biodiesel", *Energy*, Vol. 166, pp. 1025-1036, (2019).
- [24] P. Nautiyal, K. A. Subramanian and M. G. Dastidar, "Production and characterization of biodiesel from algae", *Fuel Process Technol.*, Vol. 120, pp. 79–88, (2014).
- [25] U. Rajak and T. N. Verma, "Effect of emission from ethylic biodiesel of edible and non-edible vegetable oil, animal fats, waste oil and alcohol in CI engine", *Energy Convers. Manage.*, Vol. 166, pp. 704-718, (2018).
- [26] O. D. Samuel and M. O. Okwu, "Comparison of Response Surface Methodology (RSM) and Artificial Neural Network (ANN) in modelling of waste coconut oil ethyl esters production", *Energy Source Part A*, Vol. 41, No. 9, pp. 1049-1061, (2018).
- [27] T. S. Singh and T. N. Verma, "An assessment study of using Turel Kongreng (river mussels) as a source of heterogeneous catalyst for biofuel production", *Biocatal. Agric. Biotechnol.*, Vol. 20, pp. 101185, (2019).
- [28] U. Rajak and T. N. Verma, "Comparative assessment of the emission characteristics of first, second and third generation biodiesel as fuel in a diesel engine", *J. Therm. Eng.*, Vol. 6, No. 6, pp. 211-225, (2018).
- [29] U. Rajak, P. Nashine, T. S. Singh and T. N. Verma, "Numerical investigation of performance, combustion and emission characteristics of various biofuels", *Energy Convers. Manage.*, Vol. 156, pp. 235-252, (2018).
- [30] R. Banerjee and S. Kumar, "Numerical investigation of stratified air / fuel preparation in a GDI engine", *Appl. Therm. Eng.*, Vol. 104, pp. 414–428, (2016).
- [31] B. Mohan, W. Yang, V. Raman, V. Sivasankaralingam and S. K. Chou, "Optimization of biodiesel fueled engine to meet emission standards through varying nozzle opening pressure and static injection timing", *Appl. Energy*, Vol. 130, pp. 450-457, (2014).
- [32] U. Rajak and T. N. Verma, "A comparative analysis of engine characteristics from various biodiesels: Numerical study", *Energy Convers. Manage.*, Vol. 180, pp. 904-923, (2019).
- [33] U. Rajak and T. N. Verma, "Spirulina microalgae biodiesel – A novel renewable alternative energy source for compression ignition engine", *J. Clean. Prod.*, Vol. 201, pp. 343-357, (2018).
- [34] M. F. Al-dawody and S. K. Bhatti, "Optimization strategies to reduce the biodiesel NO<sub>x</sub> effect in diesel engine with experimental verification", *Energy Convers. Manage.*, Vol. 68, pp. 96–104, (2013).
- [35] A. K. Kumar, A. Dhar, J. Gopal, W. Il, K. Choi, C. Sik and S. Park, "Effect of fuel injection pressure and injection timing of Karanja biodiesel blends on fuel spray, engine performance, emissions and combustion characteristics", *Energy Convers. Manage.*, Vol. 91, pp. 302–314, (2015).
- [36] S. S. Satputaley, D. B. Zodpe and N. V. Deshpande, "Production, combustion and emission study on CI engine using microalgae oil and microalgae oil methyl esters", *J. Energy Inst.*, Vol. 90, No.4, pp. 513-521, (2017).
- [37] O. D. Samuel and M. Gulum, "Mechanical and corrosion properties of brass exposed to waste sunflower oil biodiesel-diesel fuel blends", *Chem. Eng. Commun.*, Vol. 206, No. 5, pp. 1-13, (2018).
- [38] U. Rajak, P. Nashine and T. N. Verma, "Experimental study on spray characteristics of biodiesel-diesel fuels blends in a constant volume chamber", *J. Eng. Appl. Sci.*, Vol. 5, No. 2, (2018).

- [39] U. Rajak and T. N. Verma, "Influences of engine speed variations on single cylinder direct injection diesels engine", *Aiknik Pub*, (2019). ISBN: 978-93-5335-124-3
- [40] U. Rajak and T. N. Verma, "Influence of emission characteristic using microalgae biodiesel in diesel engine", *Computer Application in Education and Research for Science and Technology*, (2019). ISBN: 978-93-87388-21-5

Copyrights ©2021 The author(s). This is an open access article distributed under the terms of the Creative Commons Attribution (CC BY 4.0), which permits unrestricted use, distribution, and reproduction in any medium, as long as the original authors and source are cited. No permission is required from the authors or the publishers.



### How to cite this paper:

Upendra Rajak, Prerana Nashine and Tikendra Nath Verma, "Effect of fuel injection pressure of microalgae spirulina biodiesel blends on engine characteristics," *J. Comput. Appl. Res. Mech. Eng.*, Vol. 11, No. 1, pp. 113-125, (2021).

**DOI:** 10.22061/JCARME.2019.4767.1578

**URL:** [https://jcarme.sru.ac.ir/?\\_action=showPDF&article=1082](https://jcarme.sru.ac.ir/?_action=showPDF&article=1082)

